

	Valve Type ¹	Key words	Drive type	Performance						Fittings				Leakage rate			Refrigerants ⁷	
				Capacity ²	KV	MWP ³	MOPD ⁴	Refrigerant Temperature	Environment Temperature	Material	Ø	Connection	Mechanical Strainer	Internal ⁵ Direct Flow	Internal ⁵ Reverse Flow	External ⁶	PED Group 2	PED Group 1
				[kW] [Tons]	[m³/h] [GPM]	[barg] [PSig]	[bar] [PSI]	[°C] [°F]	[°C] [°F]					[cm³/min]	[cm³/min]	[gr/year]		
STANDARD	E2V - F	OEM design Hermetic SS Body	Unipolar or Bipolar	0.2÷58.5 0.056÷16.6	0.01÷0.37 0.01÷0.43	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	35 508	-40÷70 -40÷158	-30÷70 -22÷158	Copper	8mm IDM 3/8" 1/2" 10mm IDM 12mm 16mm	Brazing	Optional	< 50	< 50	< 2	R22 R134a R404A R407C R410A R417A R507A R744 R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F R1233zd	R1234yf R290 R600 R600a R32 R452B R454A R454B R454C R455A R1270
	E2V - Z	Demountable Modular install IP69k stator OneBodySize Filter included	Unipolar or Bipolar	0.25÷69.6 0.071÷19.8	0.012÷0.44 0.012÷0.55	45 (UL) - 80 (PED) 650 (UL) - 870 (PED)	35 508	-40÷70 -40÷158	-30÷70 -22÷158	Copper	12mm 16mm 5/8" 1/2"	Brazing	AISI 304 150µm	< 50	< 50	< 2	R22 R134a R404A R407C R410A R744 R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	R1234yf R32 R290 R600 R600a R452B R454A R454B R454C R455A
	E3V - B	All application Hermetic SS Body	Unipolar or Bipolar	6÷201 1.7÷57.3	0.31÷1.27 0.36÷1.46	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	40 580	-40÷70 -40÷158	-30÷70 -22÷158	Copper	16mm 5/8" 22mm 7/8"	Brazing	Optional	< 100	< 100	< 2	R22 R134a R404A R407C R410A R417A R507A R744 R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F R1233zd	R1234yf R290 R600 R600a R32 R452B R454A R454B R454C R455A R1270
	E3V - S	Demountable Modular install Filter included	Unipolar or Bipolar	11÷210 3.1÷60.1	0.53÷1.33 0.61÷1.53	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	35 508	-40÷70 -40÷158	-30÷70 -22÷158	Copper	18-22mm 7/8"-1/8" 22-28mm 3/4"-7/8"	Brazing	AISI 304 150µm	< 100	< 100	< 2	R22 R134a R404A R407C R410A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	R1234yf R32 R452B R454A R454B R454C R455A
	E4V - B	Demountable Modular install	Bipolar	36÷403 10.3÷114.8	1.77÷2.55 2.05÷2.95	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	35 508	-40÷70 -40÷158	-30÷70 -22÷158	Copper	28-35mm 1.1/8" 1.3/8"	Brazing	n.a	< 50	< 80	< 2	R22 R134a R407C R410A R404A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F R744	R1234yf
	E4V - F	OEM design Hermetic	Bipolar	34÷360 9.7÷102.6	1.68÷2.28 1.94÷2.64	48 (UL) - 48 (PED) 696 (UL) - 696 (PED)	40 580	-40÷70 -40÷158	-30÷70 -22÷158	Copper	28-35mm 1.1/8" 1.3/8"	Brazing	n.a	< 50	< 80	< 2	R22 R134a R407C R410A R404A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F R1233zd	R290 R600 R600a R1234yf R32 R452B R454B R454A R454C R455A R1270
	E5V	Modular install SightGlass Big capacities	Bipolar	86÷965 24.5÷275.0	4.2÷6.1 4.8÷7.1	45 (UL) - 45 (PED) 650 (UL) - 650 (PED)	35 508	-40÷70 -40÷158	-30÷70 -22÷158	Copper	28mm 35mm	Brazing	n.a	< 100	< 200	< 2	R22 R134a R407C R410A R404A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	(ONLY E5VxxASS) R1234yf R32 R452B R454A R454B R454C R455A
	E6V		Bipolar	194÷1850 55.3÷527.0	9.5÷11.7 11.0÷13.5	45 (UL) - 45 (PED) 650 (UL) - 650 (PED)	28 406	-40÷70 -40÷158	-30÷70 -22÷158	Copper	35-42mm 1.5/8"	Brazing	n.a	< 100	< 200	< 2	R22 R134a R407C R410A R404A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	n.a.
	E7V		Bipolar	319÷2989 90.9÷851.6	15.6÷18.9 18.0÷21.9	42 (UL) - 45 (PED) 609 (UL) - 650 (PED)	28 406	-40÷70 -40÷158	-30÷70 -22÷158	Copper	54mm 1.5/8"	Brazing	n.a	< 100	< 200	< 2	R22 R134a R407C R410A R404A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	n.a.
E7V TWIN	Bipolar		637÷6234 181.5÷1776.0	15.6÷37.8 18.0÷43.8	25 (UL) - 25 (PED) 360 (UL) - 360 (PED)	28 406	-40÷70 -40÷158	-30÷70 -22÷158	Copper	3" ODF	Brazing	n.a	< 100	< 200	< 2	R22 R134a R407C R410A R404A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	n.a.	
CO ₂	E2V - C	Hermetic All SS HighPressures TwoFittingsTypes	Unipolar or Bipolar	0.2÷23.72 0.057÷6.76	0.01÷0.15 0.01÷0.29	140 (UL) - 140 (PED) 1305 (UL) - 1305 (PED)	120 1740	-40÷70 -40÷158	-30÷70 -22÷158	AISI 316	10mm 12mm 13.1mm IDF 3/8"	TIG Swagelok Brazing	Optional	< 50	< 50	< 2	R22 R134a R404A R407C R410A R744 R507A R417A R407H R407A R407E R407F	n.a
	E3V - C	Demountable Filter included HighPressures All SS	Bipolar	7.5÷174.0 2.1÷49.6	0.37÷1.10 0.43÷1.26	120 (UL) - 140 (PED) 1740 (UL) - 2030 (PED)	90 1305	-40÷70 -40÷158	-30÷70 -22÷158	AISI 316	5/8" 7/8"	TIG	AISI 304 150µm	< 150	n.a	< 2	R744	n.a
HOT GAS	E2V - H	HighTemp. Demountable Modular install Filter included	Unipolar or Bipolar	1.1÷74.8 0.03÷21.3	0.05÷0.47 0.058÷0.54	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	35 508	-40÷100 -40÷215	-30÷70 -22÷158	Copper	18-22mm 22-28mm 3/4"-7/8" 7/8"-1/8"	Brazing	AISI 304 150µm	n.a	n.a	< 2	R22 R134a R404A R407C R410A R744 R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	R1234yf R32 R452B R454A R454B R454C R455A
	E3V - H	HighTemp. Demountable Modular install Filter included	Unipolar or Bipolar	11÷210 3.1÷59.8	0.53÷1.33 0.61÷1.54	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	35 508	-40÷100 -40÷215	-30÷70 -22÷158	Copper	12mm 16mm 5/8"	Brazing	AISI 304 150µm	n.a	n.a	< 2	R22 R134a R404A R407C R410A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F	R1234yf R32 R452B R454A R454B R454C R455A
	E4V - H	HighTemp. Demountable Modular install	Bipolar	38÷403 10.8÷114.8	1.88÷2.55 2.16÷2.93	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	35 508	-40÷100 -40÷215	-30÷70 -22÷158	Copper	28-35mm 1.1/8"-1.3/8"	Brazing	n.a	n.a	n.a	< 2	R22 R134a R407C R410A R404A R507A R417A R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F R744	R1234yf
AMMONIA	E2V - BS	Hermetic All SS	Bipolar	0.2÷58.5 0.056÷16.6	0.01÷0.37 0.01÷0.43	45 (UL) - 60 (PED) 650 (UL) - 870 (PED)	26 377	-40÷70 -40÷158	-30÷70 -22÷158	AISI 316	10mm 13.1mm IDF	TIG	Optional	< 50	< 50	< 2	R22 R134a R404A R407C R410A R417A R507A R744 R1234ze R448A R449A R450A R513A R407H R427A R452A R407A R407E R407F R1233zd	R1234yf R717 R290 R600 R600a R32 R452B R454A R454B R454C R455A R1270


Notes:

1. H : Hermetic ; D : Demountable
2. Capacity refers to: R410A t_{ev} = 7°C (45°F) t_{cond} = 45°C (113°F) SC = 5 K (9°R)
3. MWP may decrease for some Group 1 Refrigerants or for some specific models
4. MOPD may decrease with bigger orifices for the same valve or certification or motor
5. Internal leakage rate of N2 @ DP 30 bar
6. External leakage rate of R134a @ P = 45 barg
7. Refrigerants list may vary

For further details see products technical leaflets available on our website or contact us at carel@carel.com

Valve proposition	
F	Hermetically sealed designed for OEMs
S/Z	Modular installation with filter included
C/CS	For high pressure installations
H	Designed for high temperature applications
E4V, E5V, E6V, E7V	Demountable for high capacity applications

Referring to R410A Tev: 7°C, Tcond: 45°C, SK: 5K					Correction Factors kW = kW _{REF} / CF
R32	R1234yf	R1234ze	R407C	R417A	
0,67	2,05	1,87	1,16	1,50	
Referring to R134A Tev: -10°C, Tcond: 45°C, SK: 5K					(kW _{REF} relative to Capacity column)
R404A	R717	R290	R448A	R449A	
1,14	0,15	0,75	0,81	0,82	

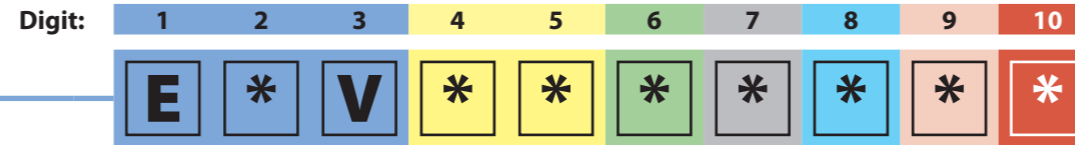

Type
E * V

2
3
4
5
6
7

Size
**

E2V	E3V	E4V	E5V	E6V	E7V
01	30	65	A2	A8	B4
03	35	85	A4	B2	C1
05	45	95			
09	55	A1			
11	65				
14					
18					
24					
30					
35					

Family
*

B, F: Hermetic
S, Z: Demountable
C: High pressure
H: High temperature
R: RPRV (only E5V)

Type of connection
*

S: To be welded, metric
W: To be welded, imperial

Size of connection
*

Option
*

Package
*

0: Single
1: Multiple

Type of connection	Inlet/Outlet	E2V-F	E2V-S/-Z/-H	E2V-C	E3V-H/-S	E3V-C	E3V-B	E4V-B/-H	E4V-F	E5V	E6V	E7V
S (mm)	8x8 (5/16")	A										
	10x10	B	O									
	12x12	F	F	F								
	13x13			1								
	16x16 (5/8")	M	M				M					
	18x22				R							
	22x22						R					
	22x28				S							
	28x28								T	S	S	
	28x35											
	35x35 (1.3/8")									T		
	35x35										T	T
	42x42											V
54x54												Z
W (inches)	3/8x3/8	A	A									
	1/2x1/2	F	F									
	3/4x7/8				R							
	7/8x1/8				S							
	7/8x7/8					R	R					
	5/8x5/8					M						
	1.1/8x1.1/8								S			
	1.1/8x1.3/8									T		
1.1/8x1.5/8											V	

Type	Family	S/Z	C	F	H	S/H	C	B	-	E5V/E6V/E7V
Option (*)	0	Bip, W SG	Bip	Bip		Bip, W SG	Bip		W SG	W SG
	1	Bip, W/O SG		Uni, CL 1m	Bip, W/O SG	Bip, W/O SG		Bip	W/O SG	W/O SG
	2	Uni, W SG, CL 1m		Uni, CL 2m		Uni, W SG, CL 1m				
	3	Uni, W/O SG, CL 1m		Uni, CL 0,3m		Uni, W/O SG, CL 1m		Uni, W/O SG, CL 1m		
	4	Uni, W SG, CL 2m		Uni, CL 0,7m		Uni, W SG, CL 2m			W SG, W gas. HNBR	W SG, W gas. HNBR
	5	Uni, W/O SG, CL 2m				Uni, W/O SG, CL 2m		Uni, W/O SG, CL 2m		
	6	Uni, W SG, CL 0,3m				Uni, W SG, CL 0,3m				
	7	Uni, W/O SG, CL 0,3m				Uni, W/O SG, CL 0,3m		Uni, W/O SG, CL 0,3m		
	A	W/O S, W SG							W/O S, W SG	
	B	W/O S, W/O SG							W/O S, W/O SG	
	C		W/O S	W/O S	W/O S	W/O S, W/O SG		W/O S		

Note: - W/O = without; W = with; S= stator; SG = sight glass; Uni. = unipolar; Bip. = bipolar; CL = cable length; gas. = gasket
 - not all the combinations are available
 - for E4V/E5V/E6V/E7V only the bipolar stator is available

Images herein attached are exemplifying and do not represent the whole Carel's portfolio


E2VSTA031* - E2VSTA032* - E2VSTA037*



E2VSTAS23*



E2VSTA020*



E2VSTAX3*




STATOR								
ExV Family	Code	Unipolar	Bipolar	Stator IP	Cable	Length [m]	Terminal	
E2V	E2VSTA037*	✓		67	YES	0.7	JST	
	E2VSTA031*	✓		67	YES	1	JST	
	E2VSTA032*	✓		67	YES	2	JST	
	E2VSTAS31*	✓		69K	YES	1	JST	
	E2VSTAS32*	✓		69K	YES	2	JST	
	E2VSTAS22*			✓	69K	YES	2	Free
	E2VSTAX31*	✓	Ex		67	YES	1	JST
	E2VSTAX32*	✓	Ex		67	YES	2	JST
	E2VSTAX3T*	✓	Ex		67	YES	3	JST
	E2VSTAX21*			✓	67	YES	1	-
	E2VSTAX2T*			✓	67	YES	3	-
	E2VSTA033*	✓			67	YES	0.3	Superseal
	E2VSTAS33*	✓			69K	YES	0.3	Superseal
	E2VSTAS23*			✓	69K	YES	0.3	Superseal
	E2VSTA020*			✓	67	NO	-	-
	E3V	E3VSTA031*	✓		67	YES	1	JST
		E3VSTA032*	✓		67	YES	2	JST
		E3VSTA033*	✓		67	YES	0.3	Superseal
		E3VSTA035*	✓		67	YES	0.5	Superseal
	E3VSTA020*			✓	67	NO	-	-
E4V&E7V	E4VE7VSTA*		✓	67	NO	-	-	
E5V&E6V	E5VE6VSTA*		✓	67	NO	-	-	

Note: Last digit = 0 : single pack; Last digit = 1 : multiple pack; E2VSTAX: ATEX stator

CABLES							
Code	Unipolar	Bipolar	Shield	Length [m]	Stator	Driver	
E2VCABS3U0	✓		YES	3	Superseal	JST	
E2VCABS6U0	✓		YES	6	Superseal	JST	
E2VCABS9U0	✓		YES	9	Superseal	JST	
E2VCAB0310		✓	NO	3	Superseal	Free	
E2VCAB0610		✓	NO	6	Superseal	Free	
E2VCAB0910		✓	NO	9	Superseal	Free	
E2VCABS310		✓	YES	3	Superseal	Free	
E2VCABS610		✓	YES	6	Superseal	Free	
E2VCABS910		✓	YES	9	Superseal	Free	
E2VCAB0300		✓	NO	3	Direct	Free	
E2VCAB0600		✓	NO	6	Direct	Free	
E2VCAB0900		✓	NO	9	Direct	Free	
E2VCABS300		✓	YES	3	Direct	Free	
E2VCABS600		✓	YES	6	Direct	Free	
E2VCABS900		✓	YES	9	Direct	Free	
E2VCABSA50		✓	YES	15	Direct	Free	

Images herein attached are exemplifying and do not represent the whole Carel's portfolio

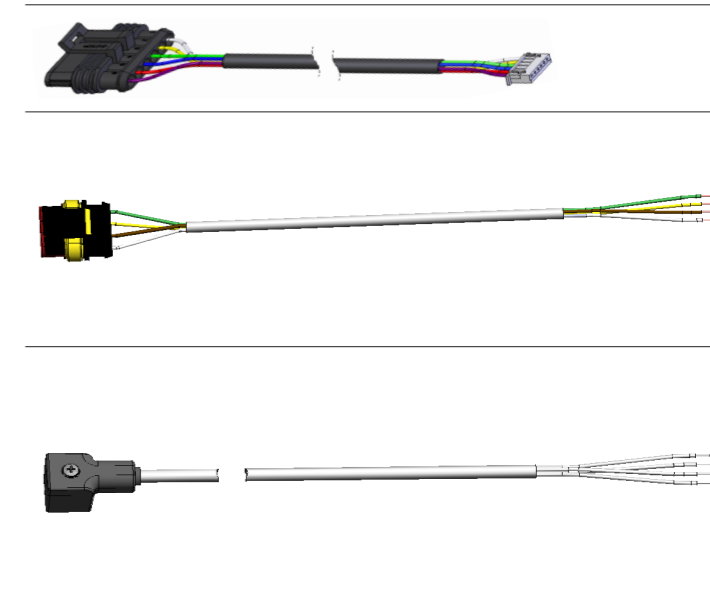

For further details see products technical leaflets available on our website or contact us at carel@carel.com

ExV - VALVES COMPONENTS DESCRIPTION

Accessory	Description
E2VFIL0000	AISI 304 wired mesh 500 um filter 3/8" (10 pcs)
E2VFIL0100	AISI 304 wired mesh 500 um filter 12 mm (10 pcs)
E2VFIL0200	AISI 304 wired mesh 500 um filter 16 mm (10 pcs)
E2VFIL0300	AISI 304 wired mesh 500 um filter 3/8" (10 pcs)
E2VFIL0400	AISI 304 wired mesh 150 um filter (10 pcs)
E3VFIL0000	AISI 304 wired mesh 500 um filter for E3V (10 pcs)
E3VFIL0100	AISI 304 wired mesh 200 um filter for E3V-C (1 pc)
E3VFIL0200	AISI 304 wired mesh 200 um filter 22 mm or 7/8" for E3V-B (10 pcs)
E2VORI0000	O-Ring 11.1X1.78 mm (neoprene) and teflon gasket (10 pcs)
E2VORI0100	O-Ring 8.73X1.78 mm (neoprene), O-Ring 11.1X1.78 mm (neoprene) and teflon gasket (10 pcs)

Accessory	Description
E3VORI0300	O-Ring 2.62X20.29 mm (EPDM) (1 pc)
E3VORI0600	O-Ring 11.1X1.78 mm (neoprene) and teflon gasket (1 pc)
E4VORI0000	O-Ring 1.78X20.35 mm (neoprene) and O-Ring 28.25X2.62 mm (neoprene) (10 pcs)
E5VORI0100	O-Ring 1.78X20.35 mm (neoprene) and O-Ring 2X20 mm (neoprene) (1 pc)
E7VORI0000	O-Ring 1.78X20.35 mm (neoprene) and O-Ring 34.59X2.62 mm (neoprene) (10 pcs)
E2VSGH0000	Sightglass for E2V and E3V
E4VSGH0000	Sightglass for E4V E5V E6V and E7V
E4VSGH0010	Sightglass for E4V E5V E6V and E7V with hum. indicator

Accessory	Description
E2VATT**H0	E2V-H spare actuator (**: valve size)
E2VATT**S0	E2V-S spare actuator (**: valve size)
E3VATT**H0	E3V-H spare actuator (**: valve size)
E3VATT**C0	E3V-C spare actuator (**: valve size)
E3VATT**S0	E3V-S spare actuator (**: valve size)
E2VATT**Z*	E2V-Z spare actuator (**: valve size, last digit: 0 = 1 pc; 1 = 10 pcs)
E4VATT***0	E4V-B spare actuator (**: valve size)
E4VATT**H0	E4V-H spare actuator (**: valve size)
E5VATT***0	E5V spare actuator (***: valve size)
E6VATT****	E6V spare actuator (***: valve size, last digit: 0 = 1 pc; 1 = 5 pcs)

Accessory	Description
E7VATT****	E7V spare actuator (***: valve size, last digit: 0=1 pc; 1=5 pcs)
E2VNUT0200	Fastening nut for E2V and E3V (20 pcs)
E2VNUT0300	Fastening nut for E2V and E3V (100 pcs)
E4VNUT0000	Fastening nut for E4V, E5V, E6V and E7V (20 pcs)
E4VNUT0100	Fastening nut for E4V, E5V, E6V and E7V (100 pcs)
E2VMAG0000	Manual actuator for E2V
E3VMAG0000	Manual actuator for E3V, E5V and E6V
E4VMAG0000	Manual actuator for E4V and E7V
E2VMAG0000	Manual actuators for E2V, E3V, E4V, E5V, E6V and E7V

Legend: Filter (orange), O-Ring (yellow), Sight glass (including O-Ring) (red), Actuator (Includes filter (only for E2V and E3V) and O-Ring) (green), Nut (blue), Magnet (grey)

	Type	Connection type	Connection size	Filter							O-Ring					Sight glass ^a			Actuator ^b							Nut				Magnet											
				E2VFIL0000	E2VFIL0100	E2VFIL0200	E2VFIL0300	E2VFIL0400	E3VFIL0000	E3VFIL0100	E3VFIL0200	E2VOR10000	E2VOR10100	E3VOR10300	E3VOR10600	E4VOR10000	E5VOR10100	E7VOR10000	E2VSGH00000	E4VSGH00000	E4VSGH00010	E2VATT**H0	E2VATT**S0	E2VATT**Z*	E3VATT**H0	E3VATT**C0	E3VATT**S0	E4VATT**H0	E4VATT**F0	E4VATT**H0	E5VATT**H0	E6VATT****	E7VATT****	E2VNUT0200	E2VNUT0300	E4VNUT0000	E4VNUT0100	E2VMAG0000	E3VMAG0000	E4VMAG0000	EEVMAG0000
STANDARD	E2V**	F	S	A/B/F																																					
			W	A																																					
			F																																						
	E2V**	S	S	F/M																																					
			W	F																																					
	E2V**	Z	S	F/M																																					
			W	F																																					
	E3V**	B	S	M																																					
			W	R																																					
E3V**	S	S/W	R/S																																						
E4V**	B	S	T																																						
		W																																							
E4V**	F	S	S/T																																						
		W	S																																						
E5V**	A	S	S/T																																						
E6V**	A	S	T/V																																						
		W	V																																						
E7V**	A	S	Z																																						
		W	V																																						
CO ₂	E2V**	C	S	0																																					
			Z	1/F																																					
		W	A																																						
E3V**	C	W	M																																						
			R																																						
HOT GAS	E2V**	H	S	F/M																																					
			W																																						
E3V**	H	S	R/S																																						
		W																																							
E4V**	H	S	T																																						
		W																																							
AMMONIA	E2V**	B	S	0																																					
			1																																						

Notes:

- ** : Size (Digit 4, 5)
- a : Includes O-Ring
- b : Includes filter (only for E2V and E3V) and O-Ring

Filter



O-Ring



Sight glass



Actuator



Nut



Magnet



Images here in attached are exemplifying and do not represent the whole Carel's portfolio.

For further details see products technical leaflets available on our website or contact us at carel@carel.com